


DATA SHEET

BEAVER BARRIER


PRODUCT DESCRIPTION : Rigid dual wall, smooth interior wall and corrugated exterior wall, tee section with openings, directed down, attached to a length of Solflo Max.

FUNCTION: For conveying water towards an outlet in spite of beaver dams

RAW MATERIALS : Pipe: Made from ASTM D3350 high-density polyethylene (HDPE)
Anchors : 13 mm (0.51 in) steel re-bars, 1.52 m (5 ft) long, equipped with a fish hook at each end, folded and inserted between pipe corrugations

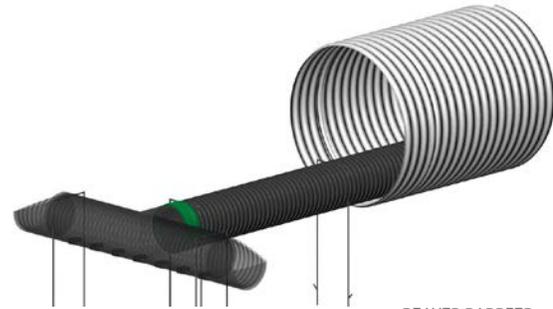

AVAILABLE COUPLERS : Double bell snap for 300 mm (12 in)
Bell with clips for 375 mm (15 in) and 450 mm (18 in)

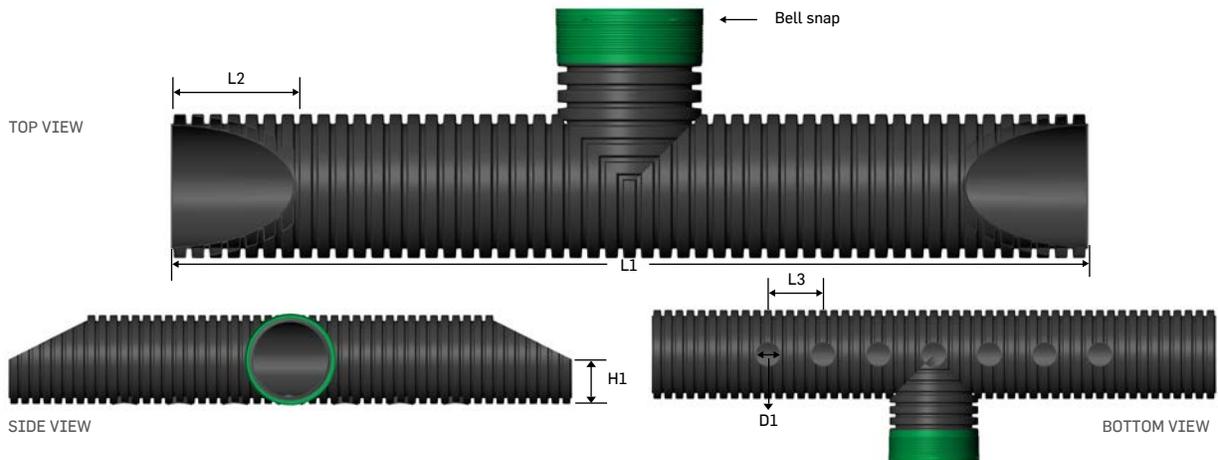

TECHNICAL DATA TABLE

Nom. dia.		Length (L1)		Length (L2)		Length(L3)		Diameter (D1)		Height H1)		Openings
mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	
300	12	3450	135	450	17.7	339	13.3	150	6.0	76.2	3.0	7
375	15	3450	135	466	18.3	339	13.3	150	6.0	95.2	3.7	7
450	18	3450	135	475	18.7	339	13.3	150	6.0	114.3	4.5	7

Length of transverse pipe: 9 m (29.5 ft)